



AMP 2.8x0.5

M3 Torque 0.4 ÷ 0.6 Nm

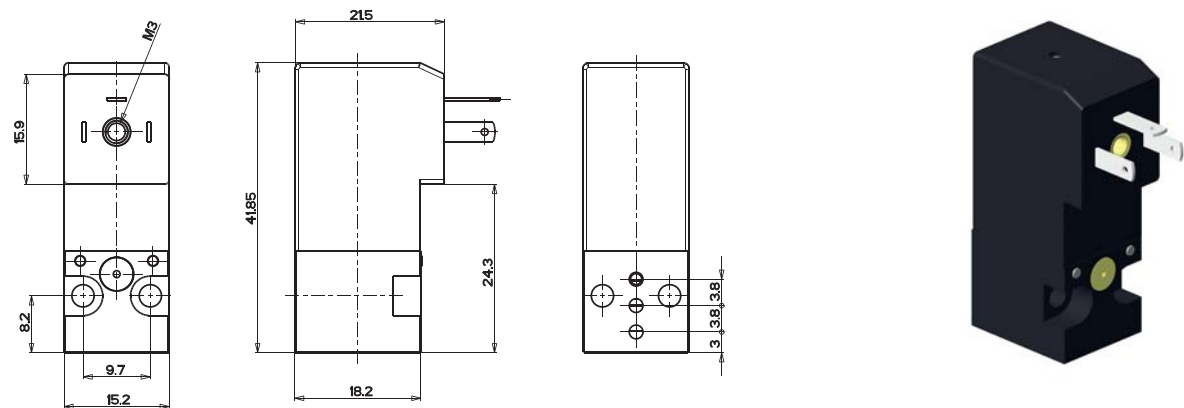

DIN C

M2.5 Torque 0.4 ÷ 0.6 Nm

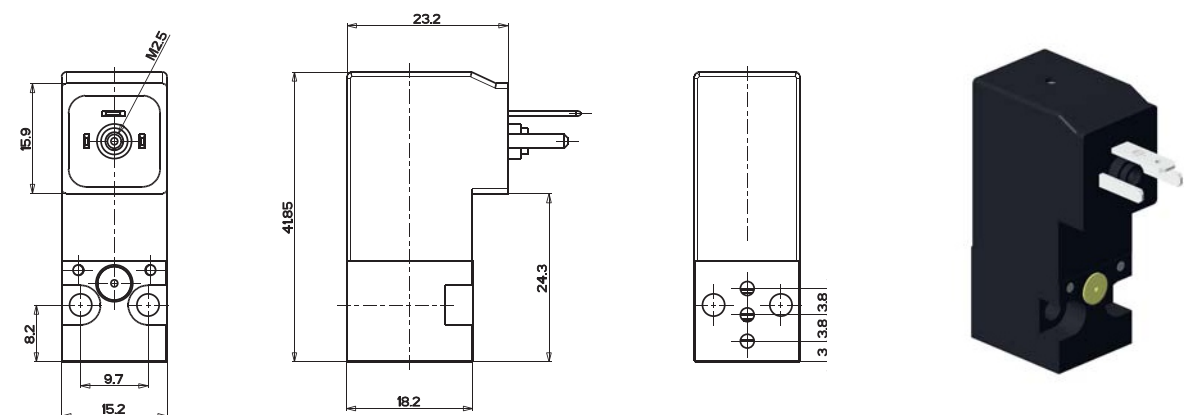

Flying Leads

Standard flying leads awg 24

